




PLAIN TILE INTERLOCKING DRY VERGE SYSTEM 15 YEAR GUARANTEE

The Interlocking Dry Verge System for plain tiles has been manufactured to prevent weather ingress and avoid reliance on mortar at the roof edge. Compatible with most machine-made single & double cambered concrete and clay plain tile types. Suitable for use on new build or refurbishment.

FEATURES AND BENEFITS

- Discrete with excellent kerbside appeal, specifically designed to retain the effect a traditional plain tile verge finish.
- Quick to install and reliable in service.
- Suitable for most machine-made single and double cambered clay and concrete plain tiles.
- Unique patented design to offer improved weather and wind resistance without reliance on mortar.
- Fully compliant with BS 8612 allowing the installation a complete dry fix plain tiled roof.
- Designed to minimise staining of the verge and gable end.
- Unique top edge profile maintains the stepped tile course appearance.
- Two tiles at once feature and unique eaves mounting bracket offer a considerable saving in time.
- Smooth lap joint improves the overall appearance.
- Eliminates the need for any tile undercloak and completes the finish at the gable.
- Suitable for all plain tile batten gauges from 88mm to 104mm.
- High heat distortion resistance compared to PVC
- UV stabilised for long term performance
- 15 years service life guarantee

PRODUCT OPTIONS

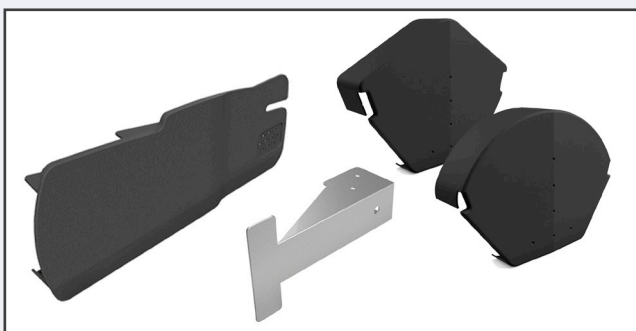

PRODUCT CODES AND COLOURS

HD INVERG	Verge unit (left or right hand)	Black, Slate Grey, Dark Brown, Antique Red, Terracotta
HD IPTDV/HR	Half-round ridge end cap	Black, Slate Grey, Dark Brown, Antique Red, Terracotta
HD IPTDV/AR	Angle ridge end cap	Black, Slate Grey, Dark Brown, Antique Red, Terracotta
HD INVERG/EB	Eaves Bracket	Galvanised steel
HD IDV/BC	Batten End Clip	Galvanised steel

TECHNICAL INFORMATION

PATENT PENDING: GB1911327.3




COMPLIES WITH BS 8612

The HD INVERG dry verge systems provide a fixing for the verge tiles for use in the wind zones 1 to 5 in accordance with BS 8612:2018 Table C.1.

MATERIAL

Polypropylene

RELATED PRODUCTS

	Interlocking Plain Tile Dry Verge System Suits all types of interlocking single lap plain tile types from 170mm to 200mm batten gauges. Code: HD IPTDV
	Soakers Lead alternative for roof abutments suitable for plain tile types. Available as an Individual Soaker; HD PCS or as a Continuous Soaker; HD CST.
	Plain Tile Vents Flush fitting, designed to replace two plain clay or concrete tiles to complete uninterrupted roofscape. Types: double tile; HD TV10/9 and double slip tile; HD TV10/10

INTERLOCKING DRY VERGE SYSTEM COMPATIBILITY

CREST	
Double Pantile	IDV
Double Roman	IDV
Planum	IDV

FORTICRETE	
Gemini	IPTDV
Minislate	IPTDV
Senator	IDV
SL8	TIDV
V2	IDV

EDILIANS	
Alpha 10	IDV*
HP10	IDV**
HP17	IDV***

LAGAN	
Double Roll	IDV
Elite	TIDV
Flat	IDV
Square Top	IDV

MARLEY	
Anglia Plus	IDV
Ashmore	IPTDV
Duo Modern	IDV
Double Roman	IDV
Edgemere	TIDV
Ludlow Major	IDV
Ludlow Plus	IDV
Malvern	IDV
Mendip	IDV
Modern	IDV
Wessex	IDV





QUINN	
Devenish	TIDV
Locherne	IDV
Rathmore	TIDV
Western Slate	IDV

REDLAND	
Double Roman	IDV
Duo Plain	IPTDV
Fenland	IDV
Grovebury	IDV
Landmark Double Pantile	IDV
Landmark Slate 10	TIDV
Mini Stonewold	IDV
Norfolk Pantile	IDV
Regent	IDV
Renown	IDV
Richmond	TIDV
Richmond 10	TIDV
Saxon 10	TIDV
Stonewold MKII	IDV

RUSSELL	
Argyll	IDV
Bute	TIDV****
Cheviot	IDV
Derwent	IDV
Double Roman	IDV
Galloway	TIDV
Grampian	IDV
Highland	IDV
Lothian	TIDV
Moray	TIDV
Pennine	IDV
Polden	TIDV

SANDTOFT (WIENERBERGER)	
Calderdale Slate	IDV
Cassius	TIDV
Double Pantile	IDV
Double Roman	IDV
Dual Calderdale	IDV
Lindum	IDV
Olympus	IDV
Neo Pantile	IDV
Rivius	TIDV
Shire Pantile	IDV
Standard Pattern	IDV
TLE	TIDV

Double Lap Tiles	
Plain Tiles	INVERG



* Batten gauge 330 to 355mm
 ** Batten gauge 310 to 355mm
 *** Batten gauge 260 to 285mm
 **** Down to 260mm batten gauge